

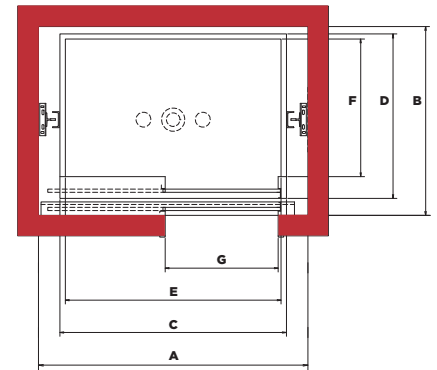


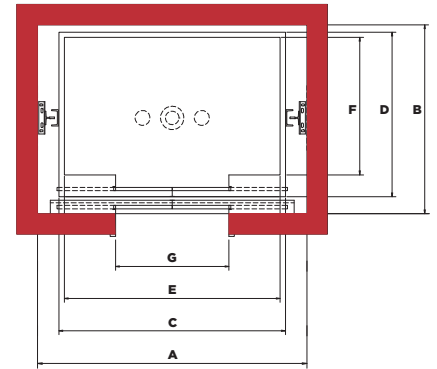

FREEDOM[®] HYDRAULIC IN-GROUND FRONT

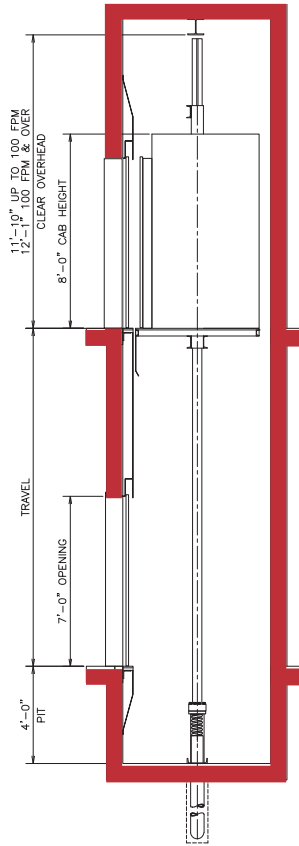

PASSENGER HOLED TYPE					FRONT OPEN ONLY	
Type	Capacity (lbs)	Hoistway	Platform	Inside Cab	Door Type	Door Width G
		Width x Depth A x B	Width x Depth C x D	Width x Depth E x F		
Passenger	2000	7'-4" x 5'-10"	6'-0" x 5'-1"	5'-8" x 4'-3"	Single Speed	3'-0"
	2500	8'-4" x 5'-10"	7'-0" x 5'-1"	6'-8" x 4'-3"	Single Speed	3'-6"
	2500	8'-4" x 5'-10"	7'-0" x 5'-1"	6'-8" x 4'-3"	Center Opening	3'-6"
	3000	8'-4" x 6'-3"	7'-0" x 5'-6"	6'-8" x 4'-8"	Single Speed	3'-6"
	3000	8'-4" x 6'-3"	7'-0" x 5'-6"	6'-8" x 4'-8"	Center Opening	3'-6"
	3500	8'-4" x 6'-11"	7'-0" x 6'-2"	6'-8" x 5'-4"	Single Speed	3'-6"
	3500	8'-4" x 6'-11"	7'-0" x 6'-2"	6'-8" x 5'-4"	Center Opening*	3'-6"
	4000	9'-4" x 6'-11"	8'-0" x 6'-2"	7'-8" x 5'-4"	Single Speed	4'-0"
Hospital	4000	7'-4" x 9'-6"	6'-0" x 8'-8"	5'-8" x 7'-8"	Two Speed	4'-0"
	4500	7'-4" x 9'-11"	6'-0" x 9'-1"	5'-8" x 8'-1"	Two Speed	4'-0"
	5000	8'-2" x 10'-5"	6'-0" x 9'-7"	5'-8" x 8'-7"	Two Speed	4'-6"



NOTES:

- 2000-lb. car complies with NEII recommendations for car to accommodate wheelchair.
- 3500-lb. and larger cars comply with NEII recommendations for car to accommodate ambulance size stretcher when equipped with single slide doors.
- Consult factory for any nonstandard sizes not shown on the charts above.

*Center parting doors do not allow stretchers.



FREEDOM[®] HYDRAULIC IN-GROUND FRONT & REAR

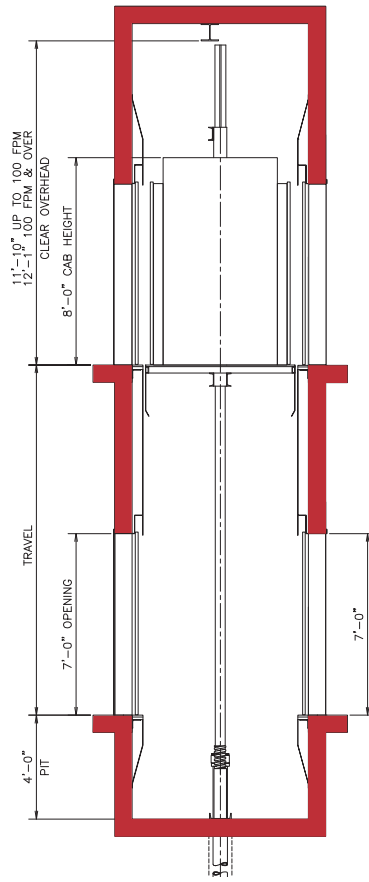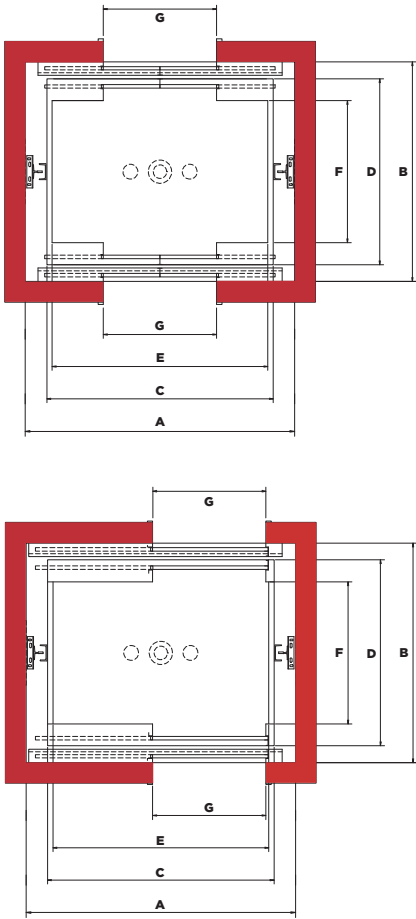

DESCRIPTION:

Traditional design utilizing a single hydraulic jack which is located directly under the platform and installed in the ground. Opening configuration available in walk-thru and/or staggered. Staggered doors are required to accommodate the ambulance size stretcher.

ADVANTAGES:

- Generally the least expensive and easiest to install
- Offered in a wide range of capacities.
- Accommodates front and rear opening configurations
- Minimal pit and overhead requirements

PASSENGER HOLED TYPE					FRONT & REAR OPEN	
Type	Capacity (lbs)	Hoistway	Platform	Inside Cab	Door Type	Door Width G
		Width x Depth A x B	Width x Depth C x D	Width x Depth E x F		
Passenger	2000	7'-4" x 6'-9 1/2"	6'-0" x 5'-9"	5'-8" x 4'-4"	Single Speed	3'-0"
	2500	8'-4" x 6'-9 1/2"	7'-0" x 5'-9"	6'-8" x 4'-4"	Single Speed	3'-6"
	2500	8'-4" x 6'-9 1/2"	7'-0" x 5'-9"	6'-8" x 4'-4"	Center Opening	3'-6"
	3000	8'-4" x 7'-1 1/2"	7'-0" x 6'-1"	6'-8" x 4'-8"	Single Speed	3'-6"
	3000	8'-4" x 7'-1 1/2"	7'-0" x 6'-1"	6'-8" x 4'-8"	Center Opening	3'-6"
	3500	8'-4" x 7'-9 1/2"	7'-0" x 6'-9"	6'-8" x 5'-4"	Single Speed	3'-6"
	3500	8'-4" x 7'-9 1/2"	7'-0" x 6'-9"	6'-8" x 5'-4"	Center Opening*	3'-6"
	4000	9'-4" x 7'-9 1/2"	8'-0" x 6'-9"	7'-8" x 5'-4"	Single Speed	4'-0"
	4000	9'-4" x 7'-9 1/2"	8'-0" x 6'-9"	7'-8" x 5'-4"	Center Opening	4'-0"
Hospital	4000	7'-4" x 10'-7 1/2"	6'-0" x 9'-4"	5'-8" x 7'-8"	Two Speed	4'-0"
	4500	7'-4" x 11'-1 1/2"	6'-0" x 9'-9"	5'-8" x 8'-1"	Two Speed	4'-0"
	5000	8'-2" x 11'-6 1/2"	6'-0" x 10'-3"	5'-8" x 8'-7"	Two Speed	4'-6"

IMPORTANT:

This information is intended for preliminary planning. We have attempted to include the basic data required for your planning efforts. For details about specific or custom installations, please contact your local Canton Elevator representative or contact us directly.

